


# Hexagon Head Wood Screw (Coach Screw)

## DIN 571 High Tensile

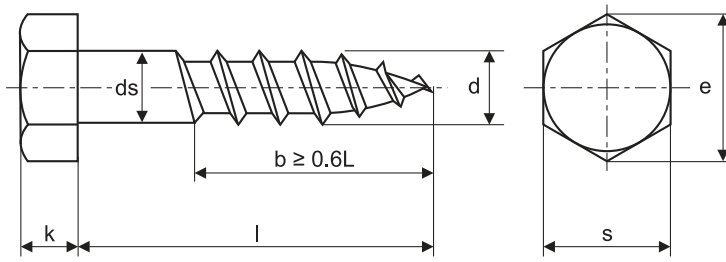

DIN 571 Dimensions of coach screws

Diameter $d$	Diameter of shank $d$		Thickness of head $k$		Width across flats $s$	
	max.	min.	max.	min.	max.	min.
M4	4.00	3.52	3.10	2.50	7.00	6.64
M5	5.00	4.52	3.88	3.13	8.00	7.64
M6	6.00	5.52	4.38	3.63	10.00	9.64
M7	7.00	6.42	5.38	4.63	12.00	11.57
M8	8.00	7.42	5.88	5.13	13.00	12.57
M10	10.00	9.42	7.45	6.55	17.00	16.57
M12	12.00	11.30	8.45	7.55	19.00	18.46
M16	16.00	15.30	10.45	9.55	24.00	23.16